

**PHILIPS**

**Selecon**




## Acclaim 18°-34° Zoomspot

**Precise beam control from a lower cost traditional profile that fully complies with European safety standards**

**Easy to Use & Affordable!**

The original Acclaim **Zoomspot** using base down 'T' class lamps - the two interchangeable zoom optical ranges provide for both longer throws from the auditorium for front stage lighting (18°-34°) and shorter throws from over or the side of the stage (24°-44°).

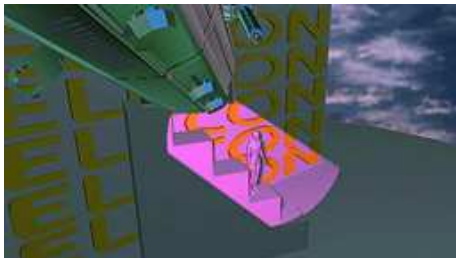

No tools are required when changing the lens systems over - quick, easy and convenient!

The beam of the Acclaim Zoomspot is easily shaped using the shutters with their generous size handles and light distribution is simply altered from peak to flat.

### Passion for Performance

Selecon combines passion for performance lighting with skills in technology and engineering, delivering **stage lighting tools for everyone.**

**220-240V only: 500W-650W**

Not available in the North American market

### Features:

**Variable beam profile providing precise beam control and pattern projection capabilities**

#### Variable Zoom

Utilise the flexibility and versatility of the two interchangeable zoom optical ranges for required beam angle and focus.



#### Adjustable Pattern Holder

For quick, accurate alignment of your pattern image.

#### Tilt Clutch Lock-Off

Precise positioning includes reference scale.

Selecon  
3 Year  
Warranty

**3**

#### Affordable!

Delivering all the operational features that the professional users demand at a cost affordable to most.

### Performance

- **Useful throw distances** : 3-15m.
- Robustly constructed from pressure die-castings and aluminium extrusion.
- Over 50% more light than most other base down 'T' class 650W luminaires.
- Available in 18°-34° or 24°-44° beam angles.
- Interchangeable lens tray between Medium and Wide versions, no tools required.

### Precision

- Selecon's posi-slide lamp and lens focus system uses brass and engineering plastic bearings which minimises damaging lamp vibration delivering a smooth, easy focus action.
- Uniquely shaped shutters offer wider degree of masking angles.
- Adjustable suspension yoke runs along the length of the luminaire to.
- Easily adjust the Peak-Flat beam settings.

### Simplicity

- Slot provided for Iris or rotatable (35°) pattern holder.
- Easy, quick access via 'swing-down' door to clean lenses or change lens systems, no tools required.
- Large heat-insulated rear grab handle assists with focusing and doubles as a handy cable coil when the luminaire is not rigged.

### Safety

- Automatic mains power disconnection via microswitch when the back is removed for relamping.

### Supplied with

- 1x colour frame, 1x fitted safety chain, 1x suspension bolt set and short form instruction manual.
- **Three-year warranty.**

### Specifications:

<b>Beam angle range</b>	18°-34°
<b>Colour frame size</b>	125mm x 125mm
<b>Cable length</b>	1m
<b>Pattern/gobo size</b>	M
<b>Accessories</b>	pattern holder / iris / lens safety mesh / 24°-44° lens tray
<b>Weight</b>	5.1kg
<b>Typical performance</b>	18°-34° at 18° Peak – 70,100cd Flat – 58,064cd 18°-34° at 34° Peak – 52,400cd Wide – 38,000cd
<b>Useful throw distances</b>	3-15m
<b>Certification</b>	CE

---

### Recommended Lamps:

#### 220-240V only

650W  
T/26, T/27  
450hrs average life

500W  
T/25, T/18  
400hrs average life